

# Thermoplastic Pavement Road Line striping machine

## **Basic Information**

Place of Origin: ChinaBrand Name: WAGE

Certification: EMS OHSMS
 Model Number: HG-15MM
 Minimum Order Quantity: 1 set

Price: 1300- 1500 USD/ set
Packaging Details: Composite board
Delivery Time: 1 to 3 weeks

Payment Terms: T/T, Western Union, MoneyGram, L/C

Supply Ability: 10 sets per week



## **Product Specification**


Work Mode: Hand PushingVersion: Thermoplastic

• Highlight: Thermoplastic Road Line striping machine,

Pavement Road Line striping machine, Thermoplastic Road Line Striping Machine

## **Product Description**

## Hand pushing thermoplastic pavement road line striping equipment

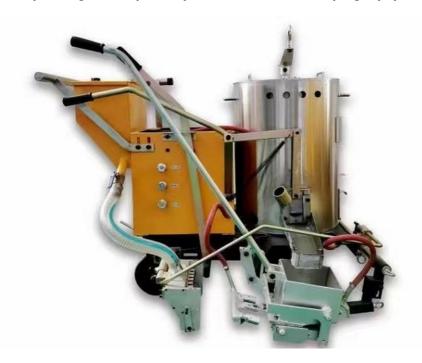

#### **Product Description**

Thermoplastic Line marking machine is a kind of road construction machinery which is widely used in road, highway, parking lot, square and runway to draw different restrictions, guidelines and warnings on the flat ground. Thermoplastic road line marking machine is the key equipment for thermoplastic road line marking construction. It is used in conjunction with thermoplastic applicator to complete marking construction.

WAGE Thermoplastic road line marking machine has the following features:

- 1. Double-layer stainless steel thermal paint barrel and inserting manual mixing device, the melt temperature and shape can be ensured to reach the best state by heating with high-efficiency gas stove.
- 2. Synchronized clutch glass bead seeder, and improved seeder, make the glass beads more evenly scattered on the marking line;
- 3. The rear wheel alignment system enables the equipment to move in a straight line with high precision and ultra-thin material. The scraper structure scratch bucket and wear-resistant cemented carbide floor knife make the edge of the marking line more neat and beautiful.
- 4.The marking width is 100/150/200/300/400/450mm. The marking bucket of the corresponding width can be replaced according to the requirement, and the width can be customized according to the requirement.



## **Parameters**

|                                      | HG-15MM   | HG-15LM                  | HG-DM                       |
|--------------------------------------|---|--------------------------|-----------------------------|
| Marking mode                         | Thermoplastic scraping                                | Thermoplastic scraping   | Thermoplastic scraping      |
| Moving mode                          | Labor pushing   | Labor pushing            | Motor self-propelled moving |
| Battery capacity &voltage            | /   | /                        | 12x4=48AH / 48V             |
| Moving speed                         | /   | /                        | 1-8km/h                     |
| Paint cylinder capacity              | 120kg   | 120kg                    | 120kg                       |
| Glass Micro sphere cylinder capacity | 25kg  | 25kg                     | 25kg                        |
| Dispenser mode                       | Automatic dispenser                                   | Manual dispenser         | Automatic dispenser         |
| Marking thickness                    | 1.2-3mm adjustment range                              | 1.2-3mm adjustment range | 1.2-3mm adjustment range    |
| Scoop size options                   | 100/150/200/300/400/450mm(marking scoops replacement) |                          |                             |
| Size (L*W*H)mm                       | 1200*900*1100   | 1200*900*1100            | 1250*1000*950               |
| Weight                               | 128kg   | 128kg                    | 150kg                       |

## **Main Parts**



Marking shoe & Paints Exit



Different size marking shoes

**The Marking shoes** made by alloy material, It can keep marking the beautiful lines when the road is not flat. Simple structure, easy to disassemble, change and maintain. We have different size shoes to be chose, 10cm, 15cm, 20cm, 30cm, 40cm, 45cm or customed.





Glass beads Dispenser

Fire nozzle

**Glass beads dispenser** makes the dispensing synchronization with the marking line and ensures the quantity of the dispensing is controllable and adjustable.

**Nozzle:**The increased nozzle on top of the outlet port and two nozzle behind of marking shoes can keep the temperature of the paint about 180 from outlet port to the ground.





Paint Tank & Filter

Glass beads tank

Paint tank Increasing the tank volume to 125L, It can melt more paint onetime to save time and improve efficiency.

Tank filter to avoid happening of bad feeding such as missing, blocking, hard operation or easy damage;

Glass beads tank volume to 125L, fulfill the extra requirement on surface paints.

## **Construction working:**









## **Contact info**

MS. Rita QU

Xi'an Wage Traffic Infrastructure Installation Co.,LTD

Mail: wagetraffic@hotmail.com Cell/ Whatsapp: +86 15591818803 Add:Room 401, Unit 2, Bilding 2, Shenglong Plaza, Weiyang Road, Xi'an, 710016, Shaanxi, China



Xian WAGE Traffic Infrastructure Installation Co., Ltd.



+86 15591818803



rita@wagetraffic.com



wagetraffic.com

Room 401, Unit 2, Biulding 2, Shenglong Plaza, Weiyang Road, Xi'an, 710016, Shaanxi, China